


# HSS FQB

(High Build Flexible Quartz Broadcast Flooring System)

## System Data Sheet

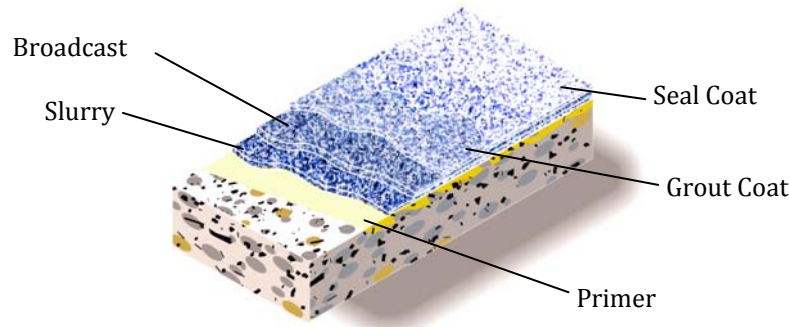

*Horizon Surface Systems FQB is a high build resinous flooring system which incorporates Flexible epoxy membrane and multi colored Ceramic Quartz Granules with high solids epoxy resins grout coats and chemical resistant urethane seal coats to form a protective crack prevention system that is aesthetically pleasing, durable and resistant to wear, staining and chemicals.*

**Advantages**

- Meets USDA, FDA and OSHA Requirements
- Superior Chemical Resistance
- High Temperature Resistance
- Continuous @ 200°
- Intermittent @ 300°
- UV Stable Top Coat
- Non Slip Finish (wet areas)
- Resistant to Algae, Fungi & Mold

**USES**

- Commercial Kitchens
- Restrooms and Locker rooms
- Pharmaceutical and Laboratories
- Operating rooms (requires polyaspartic top coat)
- Animal Care Facilities
- Packaging and Storage areas
- Service areas
- Clean Rooms

Color	Pre-Blended Standard Colors Custom Color Blends Available
Hardness @ 24 hours, Shore D ASTM D 224070/65	40
Compressive Strength ASTM D695	10,000 psi
Tensile Strength ASTM D638	1,500 psi
Bond Strength	>400 psi
Abrasion Resistance ASTM D4060, CS-17 Wheel, 1,000 cycles	.15 gr
Flexural Strength ASTM D790	6,000 psi
Flammability ASTM D635	Self-Extinguishing over concrete
Resistance to required Elevated Temperatures MIL-D-3134J	No slip or flow at temperature of 158°F
Antimicrobial Resistance ASTM G 21	Passes

<b>Application Information</b>			
	Material	Mix Ratio	Application Rate
Primer Coat:	HSS-BC	2:1	200 to 250 sf/gal
Slurry	HSS-Flex	1:1	60 to 80 sf/gal
Broadcast Broadcast Quartz	HSS-Flex	1:1	80to 100 sf/gal 50 lbs/100sf
Grout Coat	HSS UVT	2:1	100 sf/gal
Seal Coat HSS Ultra (optional)	HSS CRU	2:1	250 sf/gal

## **Installation**

All materials shall only be installed by qualified contractors. The following information is to be used as a guideline for the installation of the HSS FQB SYSTEM. Contact the Technical Service Department for assistance prior to application.

### **Surface Preparation – General**

Horizon Surface Systems FQB can be applied to a variety of substrates, if the substrate is properly prepared. Preparation of surfaces other than concrete will depend on the type of substrate, such as wood, concrete block, quarry tile, etc. Should there be any questions regarding a specific substrate or condition, please contact the Technical Service Department prior to starting the project.

### **Cleanup**

Clean up mixing and application equipment immediately after use. Use toluene or xylene. Observe all fire and health precautions when handling or storing solvents.

### **Safety**

Refer to the MSDS sheet before use. All applicable federal, state, local and particular plant safety guidelines must be followed during the handling and installation and cure of these materials. Safe and proper disposal of excess materials shall be done in accordance with applicable federal, state, and local codes.

### **Material Storage**

Store materials in a temperature controlled environment (50°F - 90°F) and out of direct sunlight. Keep resins, hardeners, and solvents separated from each other and away from sources of ignition. One year shelf life is expected for products stored between 50°F -90°F.

### **Maintenance**

Occasional inspection of the installed material and spot repair can prolong system life. For specific information, contact the Technical Service Department.

### **Surface Preparation – Concrete**

Concrete surfaces shall be abrasive blasted to remove all surface contaminants and laitance. The prepared concrete shall have a surface profile equal to CSP3-5.

After initial preparation has occurred, inspect the concrete for bug holes, voids, fins and other imperfections. Protrusions shall be ground smooth while voids shall be filled with a system compatible filler. For recommendations, consult the Technical Service Department.

### **Temperature**

Throughout the application process, substrate temperature should be 50°F - 90°F. Substrate temperature must be at least 5°F above the dew point. Applications on concrete substrate should occur while temperature is falling to lessen off gassing. The material should not be applied in direct sunlight, if possible.

### **Disclaimer**

The information and recommendations set forth in this document are based upon tests conducted by or on behalf of The Manufacturer. Such information and recommendations set forth herein are subject to change and pertain to the product(s) offered at the time of publication. Published technical data and instructions are subject to change without notice.

### **Warranty**

The Manufacturer warrants our products to be free of manufacturing defects in accord with applicable standard quality control procedures. Liability for products proven defective, if any, is limited to replacement of the defective product or the refund of the purchase price paid for the defective product as determined by the manufacturer,

NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY THE MANUFACTURER, EXPRESSED OR IMPLIED, STATUTORY, BY OPERATION OF LAW OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.



310 Scarlet Blvd.  
Oldsmar, FL 34677  
Phone: 813-854-3231 Fax: 813-855-2349